
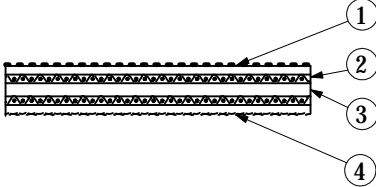


<p><b>Technical Data Sheet</b></p>	<p>PolyBelt <b>TFL-10S</b></p>	<p><b>NITTA CORP.</b> </p>	
<p><b>Construction</b></p>		<p>No.</p>	<p><b>Material</b></p> <p>1 NBR ( Taffeta Structured, Dark Blue) 2 Polyamide Fabric 3 Polyamide Film 4 NBR ( Textured Pattern, Gray)</p>
<p><b>Item</b></p>	<p><b>Description</b></p>	<p><b>Measuring Conditions</b></p>	
<p><b>Anti-Static Property</b></p>	<p>Yes</p>		
<p><b>Dimensions</b> Thickness Width Length</p>	<p>2.60mm 10 ~ 300mm 300 ~ 100,000mm</p>		
<p><b>Joint Description</b></p>	<p>Skived joint Adhesive Polybond A and E</p>		
<p><b>Physical Properties</b> Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction  Mass</p>	<p>390N/mm W 20% 2% 39.0N/mm W 70mm Approx. 80% - 20 ~ +80°C 0.5 ~ 0.6 (Dark Blue) 0.5 ~ 0.6 (Gray) 2.8kg/m<sup>2</sup></p>		<p>Test Speed 50 mm/min Ambient condition 20°C×60%  Measured on a Steel Plate Measured on a Steel Plate</p>
<p><b>Features and Main Applications</b></p>			
<p><b>Remarks</b></p>			